

GV-VD320D /321D / 322D / 323D 3MP H.264 IR Vandal Proof IP Dome



- 1/2.5" progressive scan CMOS
- Stream 1 from H.264 and MJPEG; Stream 2 from H.264, MPEG4 and MJPEG
- Up to 20 fps at 2048 x 1536
- IK10+ rating (for GV-VD320D and GV-VD321D only)
- IK7 rating (for GV-VD322D and GV-VD323D only)
- IP66 rating
- 3-axis mechanism (pan / tilt / roll)
- Removable IR-cut filter for Day/Night function
- External microphone
- Intelligent IR
- 2-way audio
- One sensor input and alarm output
- TV-out support
- Micro SD/SDHC Card Slot
- DC12V / AC24V / PoE
- Motion detection
- Tampering alarm
- Privacy mask
- IP address filtering
- Supports iPhone, iPad, Android & 3GPP
- 28 languages on Web interface

*** No SD/SDHC card slot & local storage function for Argentina**

Models

Model	Housing Cover Cover Color	Vandal Resistance
GV-VD320D	Transparent cover	IK10+
GV-VD321D	Smoked cover	IK10+
GV-VD322D	Transparent cover	IK7
GV-VD323D	Smoked cover	IK7

Active Tampering Alarm


Tampered



Focus Change



Camera Shift

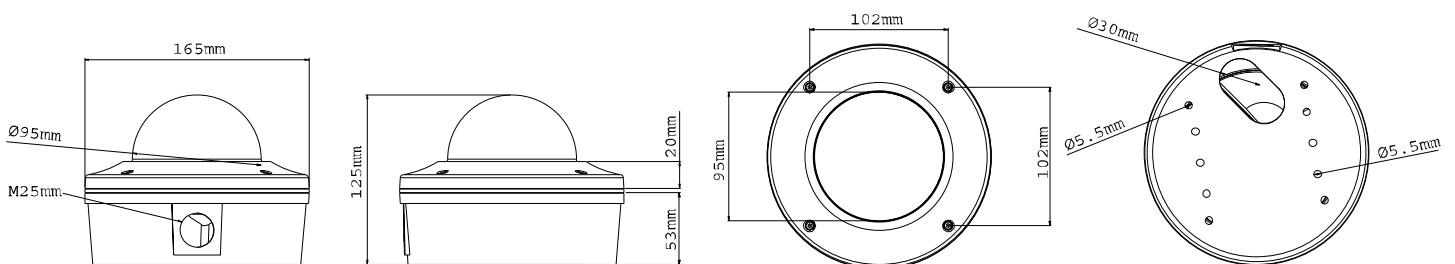

SPECIFICATIONS

Camera		
Image Sensor		1/2.5" progressive scan CMOS
Picture Elements		2048 (H) x 1536 (V)
Minimum Illumination	Color	1 Lux (1/30 sec), 0.5 Lux (1/5 sec)
	B/W	0 Lux
	IR ON	
Shutter Speed		Automatic, Manual (1/5 ~ 1/8000 sec)
White Balance		Automatic, Manual (2800K ~ 8500K)
Lens		
Megapixel		Yes
Day / Night		Yes (with removable IR-cut filter)
Lens Type		Varifocal
Focal Length		2.7 ~ 9 mm
Maximum Aperture		F/1.3
Mount		Ø 14 mm
Angle of View	Diagonal	118.4° (W) ~ 36.3° (T)
	Horizontal	94.7° (W) ~ 29° (T)
	Vertical	71.1° (W) ~ 21.8° (T)
Operation	Focus	Manual (w / lock)
	Zoom	Manual (w / lock)
	Iris	DC drive
IR LED Quantity		15 IR LEDs
IR Distance		15 m / 50 ft (Max.)
Operation		
Video Compression		H.264, MPEG4, MJPEG
Video Stream		Stream 1 from H.264 and MJPEG Stream 2 from H.264, MPEG4 and MJPEG
Frame Rate		20 fps at 2048 x 1536 * The frame rate and the performance may vary depending on the number of connections and data bitrates (different scenes).
Image Setting		Brightness, Contrast, Sharpness, Gamma, White Balance, Flicker-less, Image Orientation, Backlight Compensation, D/N Sensitivity, Shutter Speed
Audio Compression		G.711, AAC (16 kHz / 16 bit) * AAC is only supported by GV-System V8.5 or later
Sensor Input		1 Input (Dry Contact)
Alarm Output		1 Digital Output (200mA 5V DC)
Video Resolution		
Main Stream	4:3	2048 x 1536, 1600 x 1200, 1280 x 960, 640 x 480, 320 x 240
	16:9	1920 x 1080, 1280 x 720, 640 x 360, 448 x 252
	5:4	1280 x 1024, 640 x 512, 320 x 256
Sub Stream	4:3	640 x 480, 320 x 240
	16:9	640 x 360, 448 x 252
	5:4	640 x 512, 320 x 256
Network		
Interface		10/100 Ethernet
Ethernet Protocol		HTTP, HTTPS, TCP, UDP, SMTP, FTP, DHCP, NTP, UPnP, DynDNS, 3GPP/ISMA, RTSP, PSIA, SNMP, QoS (DSCP)
Mechanical		
Lens Mounting		Ø 14 mm
Temperature Detector		Yes
Camera Angle Adjustment	Pan	0° ~ 350°
	Tilt	10° ~ 90°
	Rotate	0° ~ 340°

Connectors	Power	3-pin terminal block, PoE
	Ethernet	RJ-45
	Audio	1 In (RCA female for microphone) 1 Out (RCA female for speaker)
	Digital I/O	I/O Wires
	Auto Iris	DC drive
	Local Storage	Micro SD/SDHC memory card slot (for Class 6 card or above)
	TV-Out	BNC connector (640 x 480).

General

Environment Temperature	-20 °C ~ 50 °C / 4 °F ~ 122 °F	
Humidity	10% to 90% (no condensation)	
Power Source	12V DC / 24V AC / PoE	
Max. Power Consumption	12 W	
Dimensions	Camera Body	ø 165 x 125 mm / 6.49 x 4.92 in
	Cable Length	1 m / 3.28 ft
	Cable Diameter	ø 16.7 mm / 0.66 in
	Maximum Connector Diameter	ø16.7 mm / 0.66 in
Weight	1.7 kg / 3.75 lb	
Protection Classification	IP66	
Protection Classification	IP66	
Vandal Resistance	GV-VD320D / GV-VD321D	IK10+
	GV-VD322D / GV-VD323D	IK7
Regulatory	CE, FCC, C-Tick, RoHS compliant	

Power over Ethernet

PoE Standard	IEEE 802.3af Power over Ethernet / PSE
PoE Power Supply Type	End-Span
PoE Power Output	Per Port 48V DC, 350mA. Max. 15.4 watts

Web Interface

Installation Management	Web-based configuration
Maintenance	Firmware upgrade through Web Browser or Utility
Access from Web Browser	Camera live view, video recording, change video quality, bandwidth control, image snapshot, digital I/O control, audio, Wide Angle Lens Dewarping, Picture in Picture, Picture and Picture, Privacy Mask, Visual Automation, Tampering Alarm, Text Overlay
Language	Czech / Danish / English / French / German / Hebrew / Hungarian / Italian / Japanese / Polish / Portuguese / Russian / Serbian / Simplified Chinese / Spanish / Traditional Chinese * Bulgarian, Dutch, Greek, Indonesian, Lithuanian, Norwegian, Persian, Romanian, Slovakian, Slovenian, Thai and Turkish are only supported in V1.07 or later.

Applications

Network Storage	GV-NVR, GV-System, GV-Backup Center, GV-Recording Server
Mobile Phone support	GV-AView for Android Smartphone, GV-Eye HD for iPad, GV-Eye for iPhone and iPod Touch, GV-GView for Windows PDA, GV-MSView for Windows Smartphone, GV-SSView for Symbian Smartphone, 3G-enabled phone.
Live Viewing	IE , GV-MultiView
CMS Server support	GV-Control Center, GV-Center V2, GV-VSM

- Note:**
1. Do not use clothes or any ordinary material to clean the camera cover since they may result in scratches.
 2. Specifications are subject to change without notice.